SEPLOU®

BeMedico
We care and dare

6.5Fr

Single-Use Digital Flexible Ureteroscope



Product Code


URS3005
URS3005E


Insertion Diameter ≈ Thickness of **2.7** Hairs

Slimmer Insertion Tube, **28%** Slimmer Than **9.0Fr**

SEPLOU®

URS3005

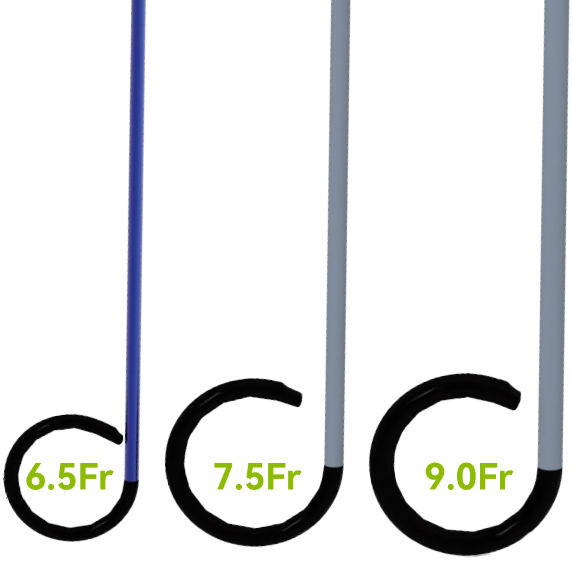





285° Deflection



Passive Deflection



Dual Illumination



160K Pixels CMOS

- **Ultra-slim insertion tube** provides a larger irrigation space and better back flow
- Especially suitable for cases of **ureteral stricture or postoperative recurrence**
- Easily enter the subrenal calyx to achieve **highly efficient lithotripsy**
- **Higher stone-free rate** Decrese stenting procuedure in pre-operation and post-operation

Model	Field of view	Direction of view	Depth of field	Definition	Insertion tube outer diameter	Working channel	Working length	Bending section angulation range	Deflection Direction
URS3005	120°	0°	3-50mm	160K Pixels	6.5Fr	3.3Fr	650mm	285°UP/DOWN	Standard
URS3005E	120°	0°	3-50mm	160K Pixels	6.5Fr	3.3Fr	650mm	285°UP/DOWN	Reverse

SEPLOU CO., LTD.

Add: Keji 10th Road, Tangjiawan Town,High-tech Zone, 519085 Zhuhai, Guangdong

Email: info@seplou.com
Website: www.seplou.com